



PVC FREE




ROCKY Ginger

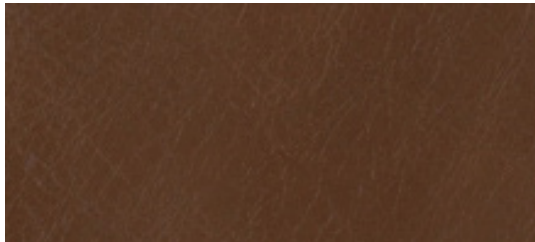


Oak

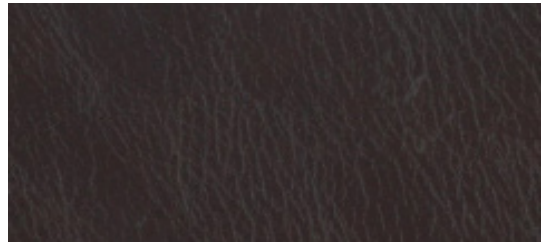


Coffee

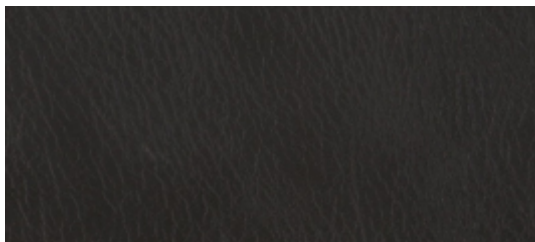

Putty

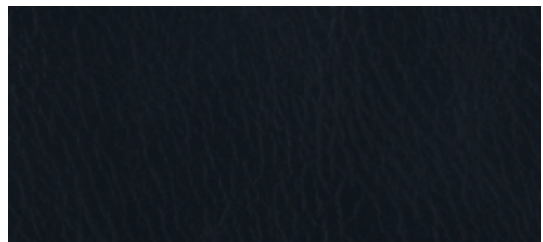

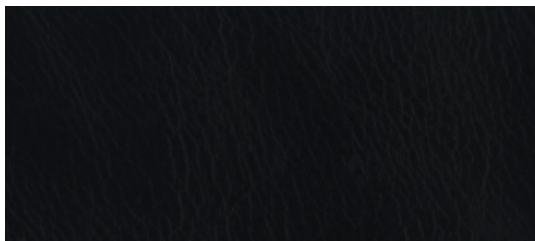

Pacific



Indigo Night

# Technical Information

Width/ Pattern	Fiber Content & Backing	Weight	Protective Finish	Abrasion Resistance	Light- fastness	Approx. Repeats	Cl. Code
54" Rocky     	40% Polyurethane 60% Polyester	10.2oz / linear yd	N/A	700,000+ Double Rubs	Level 3	Full Repeat Shown	W Bleach Cleanable (10:1)

## EXPLANATION OF ACT ICONS FOR UPHOLSTERY

### Fire Retardancy

Flammability testing determined as fabric's resistance to burning.

### Colorfastness to Light

Colorfastness to light is the degree to which fabric will retain its color when exposed to light.

### Abrasion

Abrasion is the ability of a fabric to withstand damage from wear and rubbing. There is a general contract specification as well as heavy duty specification.

### Colorfastness to Wet and Dry Crocking

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions.

### Physical Properties

3 physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seams.

### Cleaning Code Definitions

**W** Clean with water-based cleaner.

#### TORONTO


5800 Avebury Road, Unit 2  
Mississauga, ON L5R 3M3

SKU BF9964 / DECEMBER 2025

#### CHICAGO\*

325 North Wells Street, Suite 210  
Chicago, IL 60654

\*By appointment only



BF9964

**NOT FOR RESALE.**

**FOR PHYSICAL SWATCHES, PLEASE  
ORDER INDIVIDUAL MEMO SAMPLES.**

**TO VIEW OUR ENTIRE FABRIC  
COLLECTION, VISIT ALLSEATING.COM**  
T 1 800 563 3502 F 1 800 272 9911