





These disassembly instructions are also applicable to FLUID and ZIP Side.



 For material recycling information please refer to the End of Life Recovery Matrix and List of Recycling Facilities, which is available at www.allseating.com

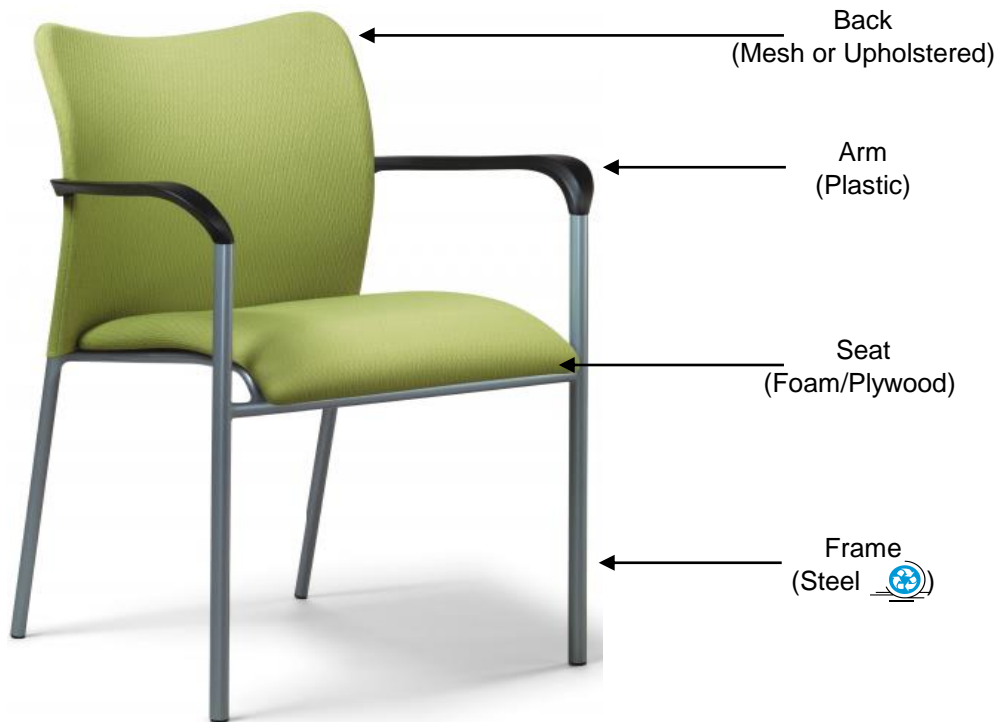

These disassembly instructions are also applicable to Fluid and Zip Side.

Tools: #2 #3 Phillips head, Allen key,
Pliers, Box cutter.
Skill Set: Good manual dexterity.
Estimated Time: 10min per chair.

Steps:

1. Armrest - 2min

Locate a fastener on each arm and unfasten. Pull the armrest upward to remove the armrest from the chair frame or use rubber mallet, knock the underside of the armrest. Continue to knock until the armrest is free from the frame.

2. Seat - 3min

Turn the chair upside down so the bottom is visible. Locate the four fasteners located on the underside of the seat pan and unfasten. Remove the seat panel from the chair frame.

3. Back Rest - 4min

Carefully cut through the mesh with the help of box cutter. Pull the mesh upward to remove from the chair frame.

4. Feet Glides - 1min

Once both the seat and back are removed from the frame, re-position the chair upside down to access glides. With pliers, firmly grasp the glide and wiggle upward until free. Repeat process for all four feet.